

## **Wikiprint Book**

**Title: What is esgf-getCredentials?**

**Subject: TracMeteo - ESGFGetCredentials**

**Version: 58**



**Date: 05/22/2022 08:11:54 PM**

## Table of Contents

<b>What is esgf-getCredentials?</b>	<b>3</b>
<b>Getting started</b>	<b>3</b>
Pre-requisites	3
Download	3
<b>Command line UI Guide</b>	<b>3</b>
<b>Graphic UI Guide</b>	<b>4</b>
Setting user	5
Setting output files	6
Advanced options	6
Retrieve credentials	7
<b>Developers Guide</b>	<b>8</b>
Github	8
Architecture	8

## What is esgf-getCredentials?

A tool to retrieve user credentials from ESGF. It have one graphic interface and another command line interface.

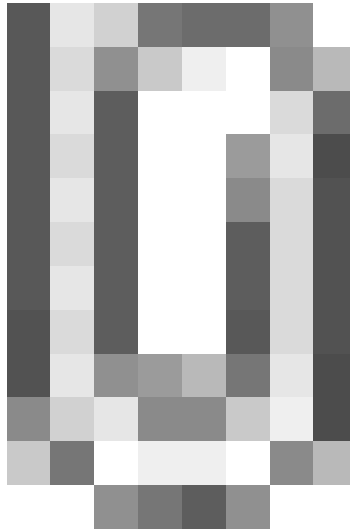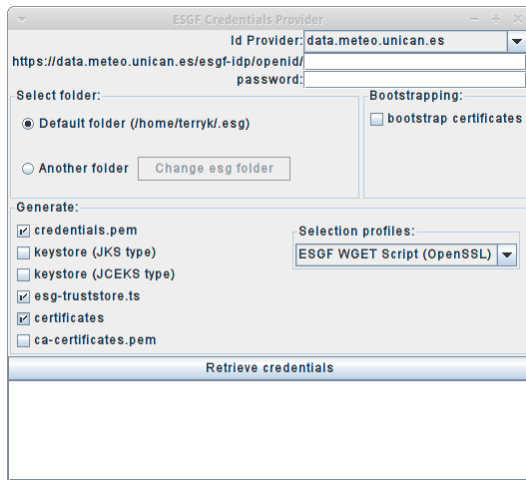

## Getting started

### Pre-requisites

JDK or OpenJDK 6 and upper versions

### Download

Download the jar -> [getESGFCredentials-0.1.jar](#) 476.4 KB new

[Other versions..](#)

## Command line UI Guide

### 1. Command line help

```
$ java -jar getESGFCredentials-0.0.2.jar --help
esgf-getcredentials.

Usage:
esgf-getcredentials
esgf-getcredentials (-o <openid> | --openid <openid>) [options]
esgf-getcredentials (-h | --help)
esgf-getcredentials --version
Options:
-o <openid> --openid <openid>  OpenID endpoint from where myproxy information can be gathered.
-p --password <password>      OpenID passphrase.
--output <path>                Path of folder where the retrieved certificates will be stored[default: /home/terryk/.esg]
-w --writeall                  Generate all credentials files. The files generated are the same files generated with option --writeall
-b --bootstrap                 To bootstrapping certificates in myproxy service.
--credentials                  Write user certificate and private key in pem format.
--cacertspem                   Write trust CA certificates in pem format.
--cacertsjks                   Write trust CA certificates in JKS keystore format.
--cacerts                       Write trust CA certificates in a folder.
--keystorejks                  Write JKS keystore file. This keystore contains certificate, certificate chain and private key.
--keystorejceks                Write JCEKS keystore file. This keystore contains certificate, certificate chain and private key.
```

```
-d --debug           Turn debugging info on.
-h --help           Show this screen.
--version           Show version.
```

#### 1. ESGF WGET Script case

```
java -jar getESGFCredentials-0.0.2.jar -o <openid> -p <password> --credentials --cacerts --cacertsjks
```

#### 1. ESGF WGET Script case (GNU TLS)

```
java -jar getESGFCredentials-0.0.2.jar -o <openid> -p <password> --credentials --cacertspem --cacertsjks
```

#### 1. ToolsUI case

```
java -jar getESGFCredentials-0.0.2.jar -o <openid> -p <password> --keystorejks --cacertsjks
```

#### 1. Aria2 case

```
java -jar getESGFCredentials-0.0.2.jar -o <openid> -p <password> --credentials --cacertspem
```

#### 1. ESGFToolsUI case

```
java -jar getESGFCredentials-0.0.2.jar -o <openid> -p <password> --credentials
```


#### 1. NETCDF DAP case

```
java -jar getESGFCredentials-0.0.2.jar -o <openid> -p <password> --credentials --cacerts --cacertspem --output <path>
```

## Graphic UI Guide


- In Windows:
  - Open getESGFCredentials-0.0.2.jar
- In Linux
  - In shell:

```
java -jar getESGFCredentials-0.0.2.jar
```


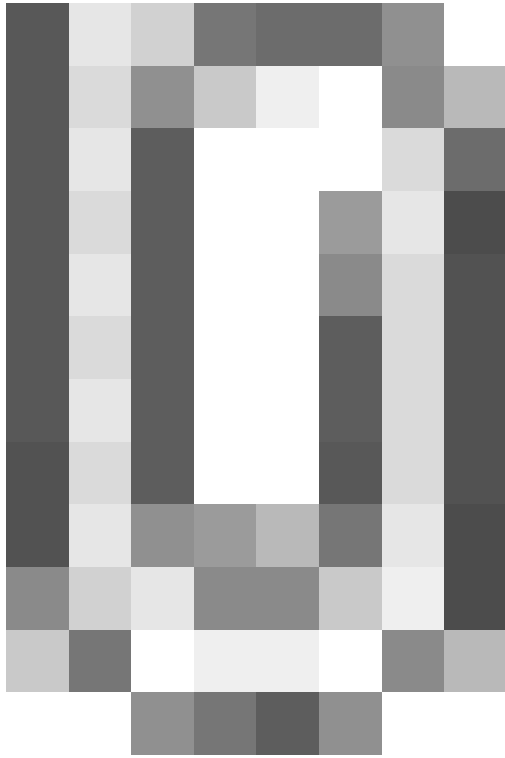


### Setting user

You can select your IdP provider in the top drop-down list

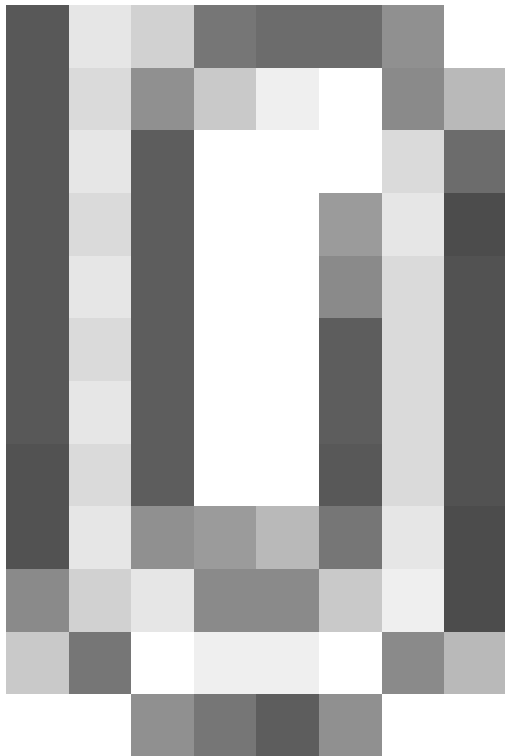

If your IdP provider isn't in the list of providers. Select "Custom OpenID URL", with this option the GUI interface change to be able write OpenID URL's [BR?](#)

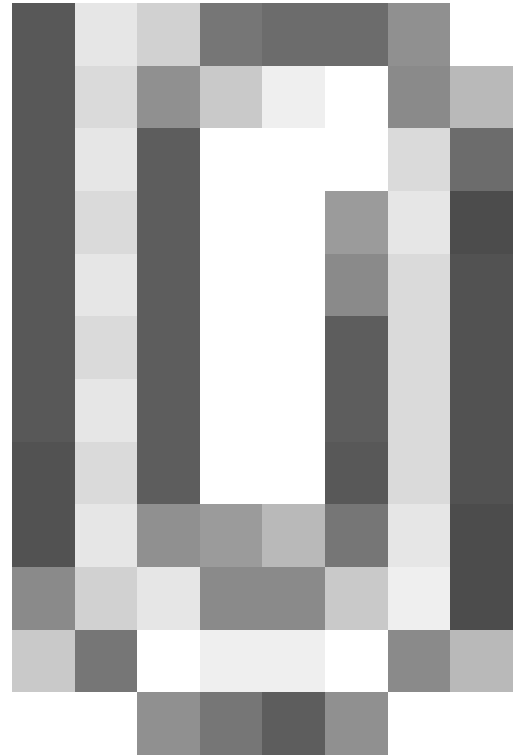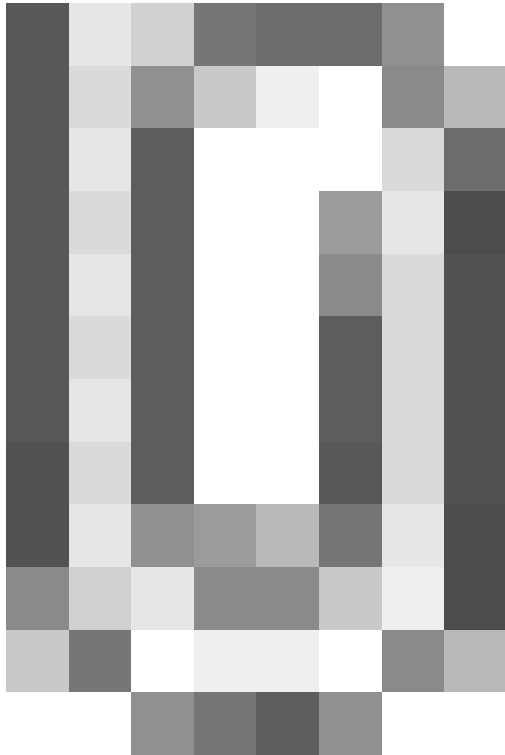

### Setting output files

You can select in "Generate" section what output files will be generated in the output folder.

credentials.pem	It's a pem file that contains the x509 user certificate and the RSA private key
keystore (JKS type)	It's a keystore in format JKS which is build with x509 certificates, RSA keys and CA's certificates
keystore (JCEKS type)	It's a keystore in format JCEKS which is build with x509 certificates, RSA keys and CA's certificates
esgf-truststore	It's a keystore in format JKS which is build with CA's certificates
certificates	It's a directory with CA's certificate files and policy files
ca-certs.pem	It's a pem file with all CA's certificates

### Advanced options


1. You can bootstrap the certificates. For that, select the check box "bootstrap certificates" in "Select Lib" section
1. You can change the output folder. The default is \$USER\_HOME/.esg



1. You can download a multilib myproxy version to select it in the "Select Lib" section


- MyProxyLogon lib v1.0
- MyProxy lib v2.0.6

MultiLib jar -> [getESGFCredentialsMultLib-0.1.jar](#) 2.3 MB new

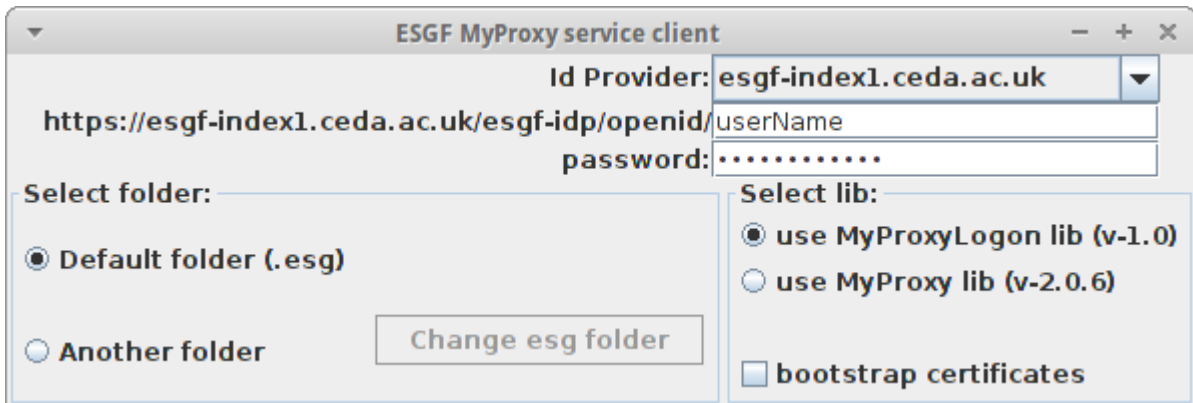


**Retrieve credentials**

Click on "retrieve credentials" button. If all goes well a success message is shown.

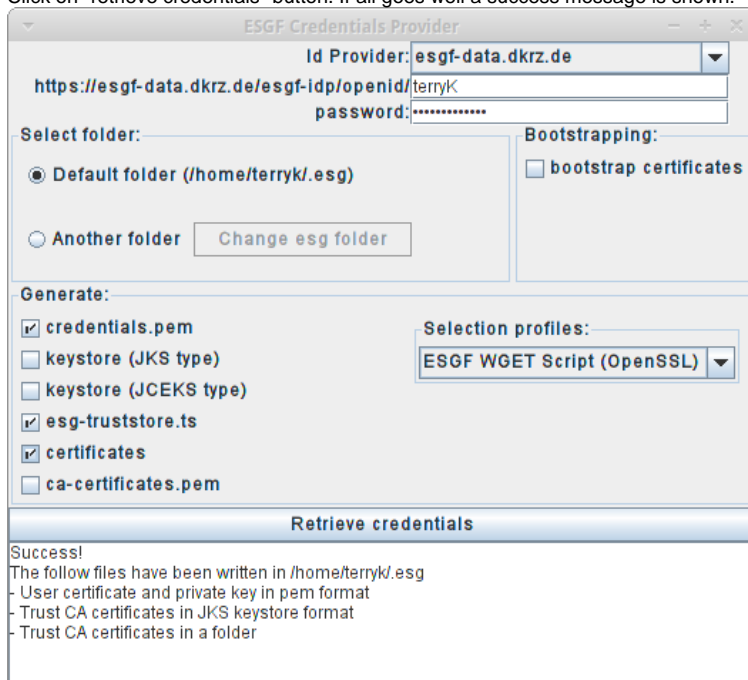

However, if some error happens then the error is showed in the box

bellow

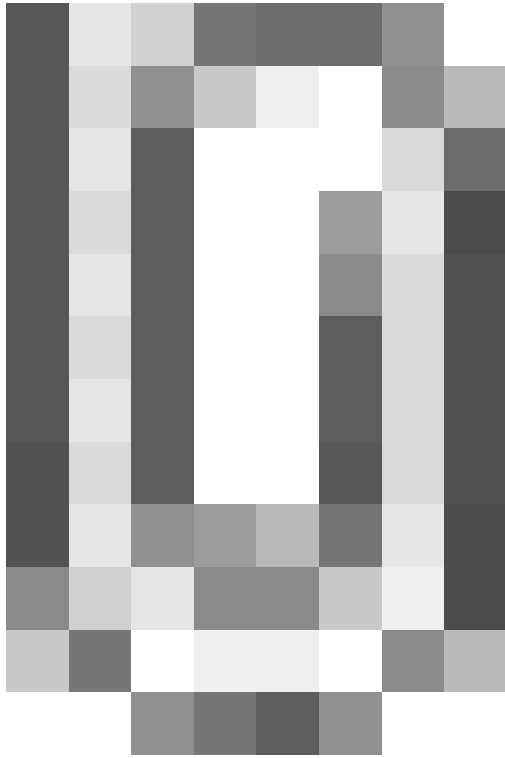

## Developers Guide

### Github

[?https://github.com/SantanderMetGroup/esgf-getcredentials](https://github.com/SantanderMetGroup/esgf-getcredentials)

### Architecture